




LF 3600 push-in fittings for industrial and food applications



Principle of LF 3600 push-in fittings

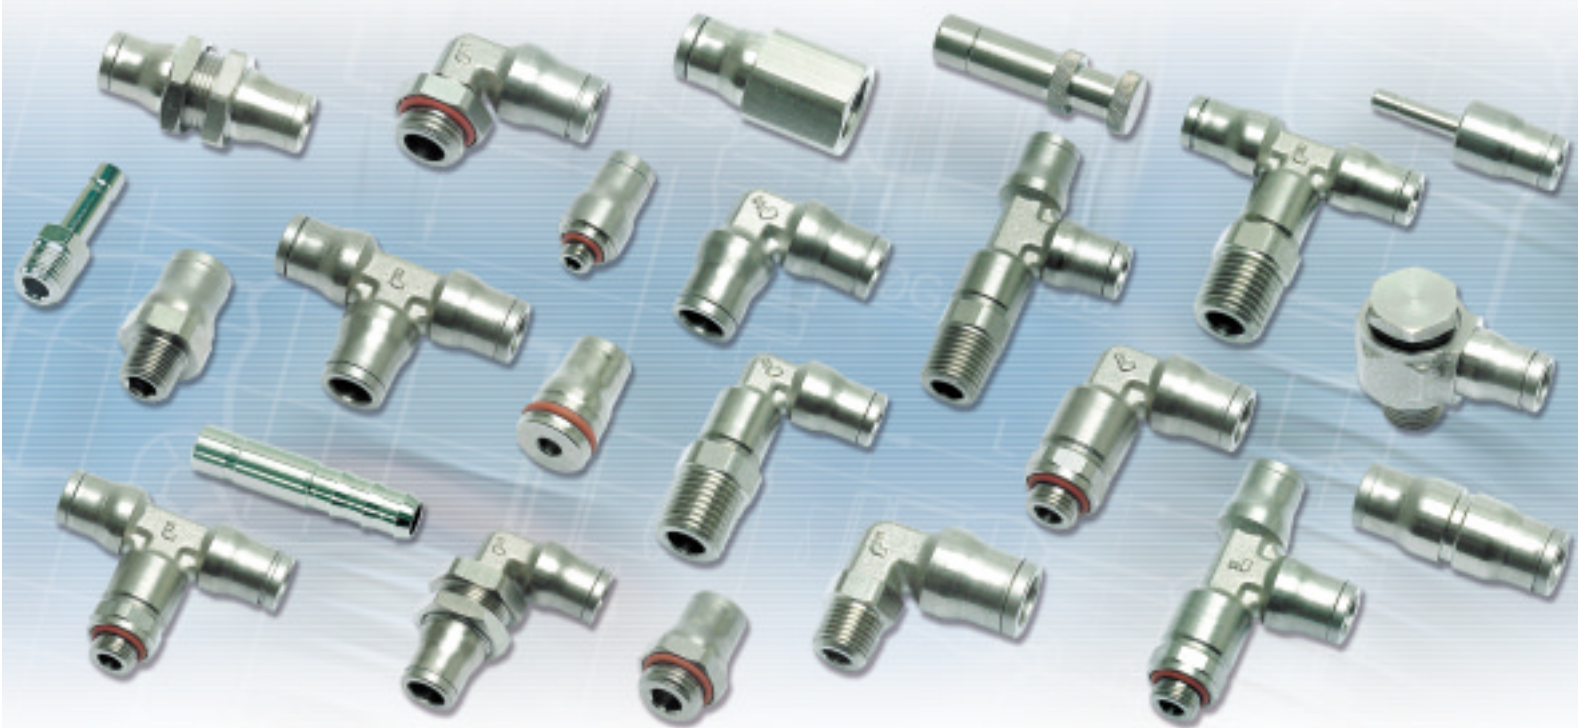


Its expertise in connection techniques and knowledge of market requirements now enable Legris to introduce a **new range of LF 3600 push-in fittings** optimized for a greater number of both **industrial and food applications**. **All metal** new LF 3600 (except sealing components) is compatible with many liquids and gases of average aggressiveness and is ideal for environments that require mechanical strength -incorporating high phosphorus chemical nickel plating that conforms to **FDA standard** (Food & Drug Administration). The principle of connection is based on a reliable high technology, rigorously tried and tested by Legris : instant manual **connection** and **disconnection**.

Technical conditions of use

These depend on the nature and thickness of the tube, the ambient temperature and that of the fluid conveyed.

| | | | | | | |
|---|---|--------|------|------|------|------|
| Suitable fluids | All liquids and gases compatible with the materials of the fitting. Examples : food fluids, cleaning / cold and hot water, steam, oils..... | | | | | |
| Working pressure | 0,5 to 20 bar | | | | | |
| Working temperature | from - 20° to + 120°C | | | | | |
| materials | body: high phosphorus FDA chemical nickel-plated brass ring: high phosphorus FDA chemical nickel-plated brass gripping teeth : high phosphorus FDA chemical nickel-plated brass sub-base: high phosphorus FDA chemical nickel-plated brass washer : FKM (FPM) fluoroelastomer conforming to FDA standard | | | | | |
| maximum tightening torque for LF 3600, BSPP and metric threads | thread | M5x0,8 | G1/8 | G1/4 | G3/8 | G1/2 |
| | m. da N | 0,16 | 0,8 | 1,2 | 3 | 3,5 |

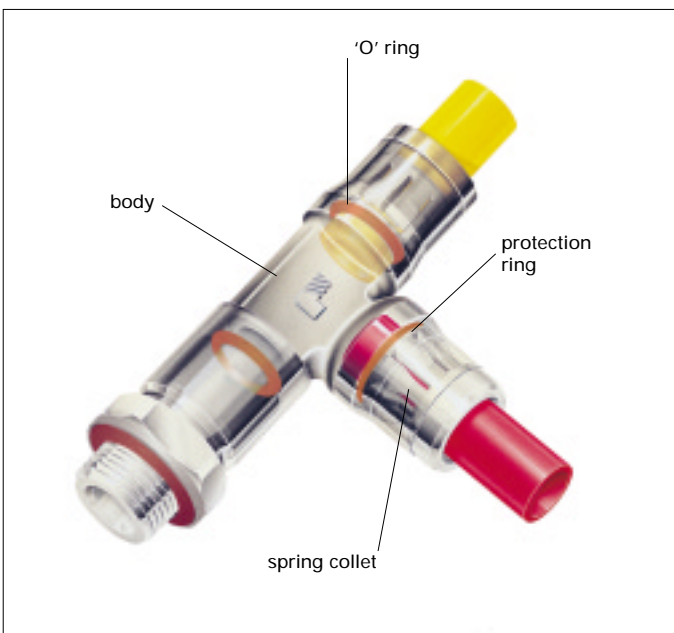


All items in the LF 3600 range are silicone free

Advantages of LF 3600 push-in fittings

INCREASED PERFORMANCE

- excellent resistance to abrasion and corrosion due to high phosphorus chemical nickel plating, individually deposited on brass components.
- working temperature from -20° to + 120°C due to “all metal” components (except sealing components)
- full flow fluid passage , no pressure drop
- automatic sealing of BSPP and metric versions via an integral sub-base washer

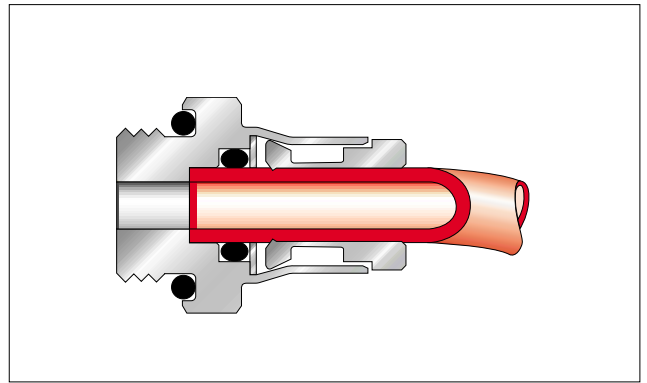

WIDE RANGE

- multiple configurations
- from Ø 4mm to 14 mm
- BSP taper, BSP parallel, metric and NPT threads
- ideal for many types of technical tubes




COMPACTNESS AND AESTHETICS

Each model has been redesigned to meet all requirements :

- compactness due to small overall dimensions with inter-connectability for bespoke configurations
- aesthetic with modernised external shapes

NUMEROUS APPLICATIONS

- suited to many industries including the food industry : ☞
 - numerous suitable fluids (food fluids, cleaning / hot and cold water, steam, oil...)
 - components and chemical nickel coating conforming to FDA standard
- examples of applications :
food and cleaning circuits, coffee machines, machine tools, centralised lubrication, soldering equipment

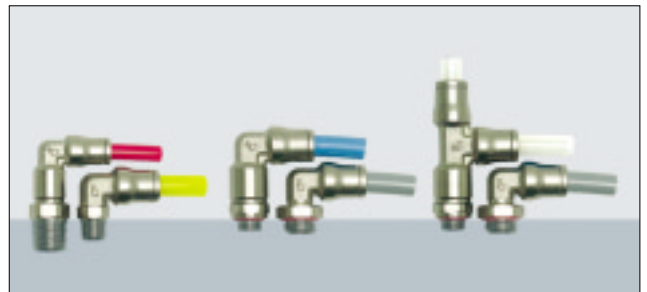

TIME SAVING CONNECTION AND DISCONNECTION


- instant manual connection and disconnection
- easy installation

Our production process includes individual unit quality control and dating, for all LF 3600 push-in fittings, in order to guarantee their quality and traceability.

3675 male stud, BSP taper



| ØD | C | | F1 | F2 | H | K |
|----|------|------------|----|----|------|------|
| 4 | R1/8 | 3675 04 10 | 10 | 3 | 15 | 11 |
| 4 | R1/4 | 3675 04 13 | 14 | 3 | 15 | 15 |
| 6 | R1/8 | 3675 06 10 | 13 | 4 | 17 | 14 |
| 6 | R1/4 | 3675 06 13 | 14 | 4 | 17 | 15 |
| 8 | R1/8 | 3675 08 10 | 15 | 5 | 19 | 16 |
| 8 | R1/4 | 3675 08 13 | 15 | 6 | 18 | 16 |
| 8 | R3/8 | 3675 08 17 | 17 | 6 | 18,5 | 18,5 |
| 10 | R1/4 | 3675 10 13 | 18 | 7 | 23 | 19,5 |
| 10 | R3/8 | 3675 10 17 | 18 | 8 | 22,5 | 19,5 |
| 12 | R1/4 | 3675 12 13 | 20 | 7 | 25,5 | 22 |
| 12 | R3/8 | 3675 12 17 | 20 | 9 | 24 | 22 |
| 12 | R1/2 | 3675 12 21 | 22 | 10 | 23 | 24 |
| 14 | R3/8 | 3675 14 17 | 22 | 9 | 27 | 24 |
| 14 | R1/2 | 3675 14 21 | 24 | 11 | 26 | 26 |




NPT

| ØD | C | | F1 | F2 | H | K |
|------|-----|------------|----|----|------|------|
| 5/32 | 1/8 | 3675 04 11 | 11 | 3 | 15 | 12 |
| 5/32 | 1/4 | 3675 04 14 | 14 | 3 | 15 | 15 |
| 1/4 | 1/8 | 3675 56 11 | 13 | 5 | 17 | 14 |
| 1/4 | 1/4 | 3675 56 14 | 14 | 5 | 17 | 15 |
| 1/4 | 3/8 | 3675 56 18 | 18 | 5 | 17 | 19,5 |
| 3/8 | 1/8 | 3675 60 11 | 18 | 5 | 24,5 | 19,5 |
| 3/8 | 1/4 | 3675 60 14 | 18 | 7 | 24 | 19,5 |
| 3/8 | 3/8 | 3675 60 18 | 18 | 8 | 23 | 19,5 |
| 3/8 | 1/2 | 3675 60 22 | 22 | 8 | 23 | 24 |
| 1/2 | 3/8 | 3675 62 18 | 22 | 9 | 24 | 24 |
| 1/2 | 1/2 | 3675 62 22 | 22 | 10 | 24 | 24 |

3601 male stud, BSP parallel and metric




| ØD | C | | F1 | F2 | H | K |
|----|--------|------------|----|-----|------|------|
| 4 | M5x0.8 | 3601 04 19 | 10 | 2,5 | 15,5 | 11 |
| 4 | G1/8 | 3601 04 10 | 13 | 3 | 14,5 | 14 |
| 4 | M6x1 | 3601 04 52 | 10 | 3 | 16 | 11 |
| 4 | G1/4 | 3601 04 13 | 16 | 3 | 14,5 | 17,5 |
| 4 | M8x1 | 3601 04 56 | 11 | 3 | 14,5 | 12 |
| 6 | M5x0.8 | 3601 06 19 | 13 | 2,5 | 19 | 14 |
| 6 | G1/8 | 3601 06 10 | 13 | 4 | 17,5 | 14 |
| 6 | M10x1 | 3601 06 60 | 13 | 4 | 17,5 | 14 |
| 6 | G1/4 | 3601 06 13 | 16 | 4 | 17 | 17,5 |
| 8 | G1/8 | 3601 08 10 | 15 | 5 | 20 | 16 |
| 8 | G1/4 | 3601 08 13 | 16 | 6 | 18 | 17,5 |
| 8 | G3/8 | 3601 08 17 | 20 | 6 | 19 | 22 |
| 10 | G1/4 | 3601 10 13 | 18 | 7 | 25 | 19,5 |
| 10 | G3/8 | 3601 10 17 | 20 | 8 | 22,5 | 22 |
| 12 | G1/4 | 3601 12 13 | 20 | 7 | 26,5 | 22 |
| 12 | G3/8 | 3601 12 17 | 20 | 9 | 26 | 22 |
| 12 | G1/2 | 3601 12 21 | 24 | 10 | 23,5 | 26 |
| 14 | G3/8 | 3601 14 17 | 22 | 9 | 28 | 24 |
| 14 | G1/2 | 3601 14 21 | 24 | 11 | 26,5 | 26 |



3681 male stud, metric thread




| ØD | C | | F | G | H |
|----|--------|------------|-----|----|----|
| 4 | M5x0.8 | 3681 04 19 | 2,5 | 10 | 16 |



3614 female stud, BSP parallel and metric




| ØD | C | | F | H | K |
|----|--------|------------|----|------|------|
| 4 | M5x0.8 | 3614 04 19 | 10 | 22 | 11 |
| 4 | G1/8 | 3614 04 10 | 14 | 25 | 15 |
| 4 | G1/4 | 3614 04 13 | 17 | 29 | 18,5 |
| 6 | G1/8 | 3614 06 10 | 14 | 27,5 | 15 |
| 6 | G1/4 | 3614 06 13 | 17 | 31,5 | 18,5 |
| 8 | G1/8 | 3614 08 10 | 15 | 28,5 | 16 |
| 8 | G1/4 | 3614 08 13 | 17 | 32,5 | 18,5 |
| 10 | G3/8 | 3614 10 17 | 22 | 38 | 24 |
| 12 | G3/8 | 3614 12 17 | 22 | 39 | 24 |
| 12 | G1/2 | 3614 12 21 | 24 | 43,5 | 26 |



3621 male stud standpipe, BSP taper




| ØD | C | | F | H | H1 | K |
|----|------|------------|----|------|-----|------|
| 4 | R1/8 | 3621 04 10 | 10 | 21 | 7 | 11 |
| 4 | R1/4 | 3621 04 13 | 14 | 21 | 7 | 15 |
| 6 | R1/8 | 3621 06 10 | 10 | 23,5 | 6,5 | 11 |
| 6 | R1/4 | 3621 06 13 | 10 | 23,5 | 6,5 | 15 |
| 8 | R1/8 | 3621 08 10 | 10 | 24 | 6,5 | 11 |
| 8 | R1/4 | 3621 08 13 | 14 | 24 | 6,5 | 15 |
| 10 | R1/4 | 3621 10 13 | 14 | 22 | 6,5 | 15 |
| 10 | R3/8 | 3621 10 17 | 17 | 30 | 7,5 | 18,5 |
| 12 | R3/8 | 3621 12 17 | 17 | 31 | 7,5 | 18,5 |
| 12 | R1/2 | 3621 12 21 | 22 | 38 | 7,5 | 24 |
| 14 | R1/2 | 3621 14 21 | 22 | 33 | 8 | 24 |



3631 male stud standpipe, BSP parallel and metric




| ØD | C | | F | H | H1 | K |
|----|--------|------------|----|------|-----|------|
| 4 | M5x0.8 | 3631 04 19 | 13 | 25,5 | 7 | 14 |
| 4 | G1/8 | 3631 04 10 | 16 | 26,5 | 7 | 17,5 |
| 4 | G1/4 | 3631 04 13 | 8 | 25 | 7,5 | 8,7 |
| 6 | G1/8 | 3631 06 10 | 13 | 28 | 6,5 | 14 |
| 6 | G1/4 | 3631 06 13 | 16 | 29 | 6,5 | 17,5 |
| 8 | G1/8 | 3631 08 10 | 13 | 28,5 | 6,5 | 14 |
| 8 | G1/4 | 3631 08 13 | 16 | 29,5 | 6,5 | 17,5 |
| 8 | G3/8 | 3631 08 17 | 20 | 30,5 | 7,5 | 22 |
| 10 | G1/4 | 3631 10 13 | 16 | 34,5 | 6,5 | 17,5 |
| 10 | G3/8 | 3631 10 17 | 20 | 35,5 | 7,5 | 22 |
| 10 | G1/2 | 3631 10 21 | 24 | 37 | 7,5 | 26 |
| 12 | G3/8 | 3631 12 17 | 20 | 36,5 | 7,5 | 22 |
| 12 | G1/2 | 3631 12 21 | 24 | 38 | 7,5 | 26 |
| 14 | G1/2 | 3631 14 21 | 24 | 40 | 8 | 26 |



for industrial and food applications

3609 male stud elbow, BSP taper




| ØD | C | | F | G | H | K | L |
|----|------|------------|----|------|------|------|------|
| 4 | R1/8 | 3609 04 10 | 11 | 10 | 15 | 12 | 18 |
| 4 | R1/4 | 3609 04 13 | 14 | 10 | 17 | 15 | 18 |
| 6 | R1/8 | 3609 06 10 | 11 | 12 | 17,5 | 12 | 21,5 |
| 6 | R1/4 | 3609 06 13 | 14 | 12 | 19 | 15 | 21,5 |
| 8 | R1/8 | 3609 08 10 | 11 | 15 | 19,5 | 12 | 23,5 |
| 8 | R1/4 | 3609 08 13 | 14 | 15 | 21 | 15 | 23,5 |
| 8 | R3/8 | 3609 08 17 | 17 | 15 | 21 | 18,5 | 23,5 |
| 10 | R1/4 | 3609 10 13 | 15 | 17,5 | 23,5 | 16 | 29 |
| 10 | R3/8 | 3609 10 17 | 17 | 17,5 | 25,5 | 18,5 | 29 |
| 12 | R1/4 | 3609 12 13 | 15 | 19,5 | 26 | 16 | 31 |
| 12 | R3/8 | 3609 12 17 | 17 | 19,5 | 28,5 | 18,5 | 31 |
| 12 | R1/2 | 3609 12 21 | 21 | 19,5 | 28,5 | 23 | 31 |
| 14 | R3/8 | 3609 14 17 | 19 | 21,5 | 29 | 21 | 34 |
| 14 | R1/2 | 3609 14 21 | 24 | 21,5 | 30 | 26 | 34 |

NPT

| ØD | C | | F | G | H | K | L |
|------|-----|------------|----|------|------|------|----|
| 5/32 | 1/8 | 3609 04 11 | 11 | 10 | 15 | 12 | 18 |
| 5/32 | 1/4 | 3609 04 14 | 14 | 10 | 17 | 15 | 18 |
| 1/4 | 1/8 | 3609 56 11 | 11 | 12,5 | 17,5 | 12 | 22 |
| 1/4 | 1/4 | 3609 56 14 | 14 | 12,5 | 19 | 15 | 22 |
| 1/4 | 3/8 | 3609 56 18 | 18 | 12,5 | 19 | 19,5 | 22 |
| 3/8 | 1/4 | 3609 60 14 | 15 | 17 | 23,5 | 16 | 29 |
| 3/8 | 3/8 | 3609 60 18 | 18 | 17 | 26 | 19,5 | 29 |
| 3/8 | 1/2 | 3609 60 22 | 22 | 17 | 27 | 24 | 29 |
| 1/2 | 3/8 | 3609 62 18 | 18 | 20 | 29 | 19,5 | 31 |
| 1/2 | 1/2 | 3609 62 22 | 22 | 20 | 29 | 24 | 31 |

3699 male stud elbow, BSP parallel and metric

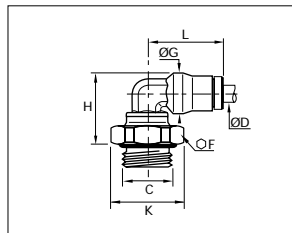


| ØD | C | | F | G | H | K | L |
|----|--------|------------|----|------|------|------|------|
| 4 | M5x0.8 | 3699 04 19 | 10 | 10 | 18 | 11 | 18 |
| 4 | G1/8 | 3699 04 10 | 13 | 10 | 17 | 14 | 18 |
| 4 | M6x1 | 3699 04 52 | 10 | 10 | 18 | 11 | 18 |
| 4 | G1/4 | 3699 04 13 | 16 | 10 | 17,5 | 17,5 | 18 |
| 4 | M8x1 | 3699 04 56 | 11 | 10 | 18 | 12 | 18 |
| 6 | G1/8 | 3699 06 10 | 13 | 12 | 19 | 14 | 21,5 |
| 6 | M10x1 | 3699 06 60 | 13 | 12 | 19 | 14 | 21,5 |
| 6 | G1/4 | 3699 06 13 | 16 | 12 | 19,5 | 17,5 | 21,5 |
| 8 | G1/8 | 3699 08 10 | 13 | 15 | 20,5 | 14 | 23,5 |
| 8 | G1/4 | 3699 08 13 | 16 | 15 | 21,5 | 17,5 | 23,5 |
| 8 | G3/8 | 3699 08 17 | 20 | 15 | 21,5 | 22 | 23,5 |
| 10 | G1/4 | 3699 10 13 | 16 | 17,5 | 27 | 17,5 | 29 |
| 10 | G3/8 | 3699 10 17 | 20 | 17,5 | 25,5 | 22 | 29 |
| 12 | G1/4 | 3699 12 13 | 16 | 19,5 | 29,5 | 17,5 | 31 |
| 12 | G3/8 | 3699 12 17 | 20 | 19,5 | 28,5 | 22 | 31 |
| 12 | G1/2 | 3699 12 21 | 24 | 19,5 | 28,5 | 26 | 31 |
| 14 | G3/8 | 3699 14 17 | 20 | 21,5 | 29 | 22 | 34 |
| 14 | G1/2 | 3699 14 21 | 24 | 21,5 | 29,5 | 26 | 34 |

NPT


| ØD | C | | F | G | H | K | L |
|------|-------|------------|----|----|----|----|----|
| 5/32 | 10-32 | 3699 04 20 | 10 | 10 | 18 | 11 | 18 |

3629 extended male stud elbow, BSP taper




| ØD | C | | F | G | H | K | L |
|----|------|------------|----|------|------|------|------|
| 4 | R1/8 | 3629 04 10 | 10 | 10 | 24,5 | 11 | 18 |
| 6 | R1/8 | 3629 06 10 | 13 | 12 | 29,5 | 14 | 21,5 |
| 6 | R1/4 | 3629 06 13 | 14 | 12 | 30,5 | 15 | 21,5 |
| 8 | R1/8 | 3629 08 10 | 14 | 15 | 32,5 | 15 | 23,5 |
| 8 | R1/4 | 3629 08 13 | 14 | 15 | 34 | 15 | 23,5 |
| 10 | R1/4 | 3629 10 13 | 18 | 17,5 | 39 | 19,5 | 29 |

3669 extended male stud elbow, BSP parallel and metric



| ØD | C | | F | G | H | K | L |
|----|--------|------------|----|------|------|------|------|
| 4 | M5x0.8 | 3669 04 19 | 10 | 10 | 27,5 | 11 | 18 |
| 4 | G1/8 | 3669 04 10 | 13 | 10 | 25,5 | 14 | 18 |
| 6 | G1/8 | 3669 06 10 | 13 | 12 | 31 | 14 | 18 |
| 6 | G1/4 | 3669 06 13 | 16 | 12 | 30,5 | 17,5 | 21,5 |
| 8 | G1/8 | 3669 08 10 | 14 | 15 | 33,5 | 15 | 23,5 |
| 8 | G1/4 | 3669 08 13 | 16 | 15 | 34 | 17,5 | 23,5 |
| 10 | G1/4 | 3669 10 13 | 18 | 17,5 | 42 | 19,5 | 29 |
| 10 | G3/8 | 3669 10 17 | 20 | 17,5 | 41 | 22 | 29 |
| 12 | G1/4 | 3669 12 13 | 20 | 19,5 | 47 | 22 | 31 |
| 12 | G3/8 | 3669 12 17 | 20 | 19,5 | 46 | 22 | 31 |

3608 male stud branch tee, BSP taper




| ØD | C | | F | G | H | K | L |
|----|------|------------|----|------|------|------|------|
| 4 | R1/8 | 3608 04 10 | 10 | 10 | 24,5 | 11 | 18 |
| 6 | R1/8 | 3608 06 10 | 13 | 12 | 29,5 | 14 | 21,5 |
| 6 | R1/4 | 3608 06 13 | 14 | 12 | 30,5 | 15 | 21,5 |
| 8 | R1/8 | 3608 08 10 | 14 | 15 | 32,5 | 15 | 23,5 |
| 8 | R1/4 | 3608 08 13 | 14 | 15 | 34 | 15 | 23,5 |
| 10 | R1/4 | 3608 10 13 | 18 | 17,5 | 39 | 19,5 | 29 |
| 12 | R3/8 | 3608 12 17 | 20 | 19,5 | 46,5 | 22 | 31 |
| 14 | R1/2 | 3608 14 21 | 22 | 21,5 | 50,5 | 24 | 34 |

NPT

| ØD | C | | F | G | H | K | L |
|------|-----|------------|----|------|------|------|----|
| 5/32 | 1/8 | 3608 04 11 | 11 | 10 | 24,5 | 12 | 18 |
| 5/32 | 1/4 | 3608 04 14 | 14 | 10 | 26,5 | 15 | 18 |
| 1/4 | 1/8 | 3608 56 11 | 13 | 12,5 | 30 | 14 | 22 |
| 1/4 | 1/4 | 3608 56 14 | 14 | 12,5 | 31 | 15 | 22 |
| 1/4 | 3/8 | 3608 56 18 | 18 | 12,5 | 31 | 19,5 | 22 |
| 3/8 | 1/4 | 3608 60 14 | 18 | 17 | 39 | 19,5 | 29 |
| 3/8 | 3/8 | 3608 60 18 | 18 | 17 | 41 | 19,5 | 29 |
| 3/8 | 1/2 | 3608 60 22 | 22 | 17 | 41 | 24 | 39 |
| 1/2 | 3/8 | 3608 62 18 | 22 | 20 | 47 | 24 | 31 |
| 1/2 | 1/2 | 3608 62 22 | 22 | 20 | 48 | 24 | 31 |

3698 male stud branch tee, BSP parallel and metric



| ØD | C | | F | G | H | K | L |
|----|--------|------------|----|------|------|------|------|
| 4 | M5x0.8 | 3698 04 19 | 10 | 10 | 27,5 | 11 | 18 |
| 4 | G1/8 | 3698 04 10 | 13 | 10 | 25,5 | 14 | 18 |
| 6 | G1/8 | 3698 06 10 | 13 | 12 | 31 | 14 | 21,5 |
| 6 | G1/4 | 3698 06 13 | 16 | 12 | 30,5 | 17,5 | 21,5 |
| 8 | G1/8 | 3698 08 10 | 14 | 15 | 33,5 | 15 | 23,5 |
| 8 | G1/4 | 3698 08 13 | 16 | 15 | 34 | 17,5 | 23,5 |
| 10 | G1/4 | 3698 10 13 | 18 | 17,5 | 42 | 19,5 | 29 |
| 12 | G3/8 | 3698 12 17 | 20 | 19,5 | 46 | 22 | 31 |
| 14 | G1/2 | 3698 14 21 | 24 | 21,5 | 49 | 26 | 34 |

NPT


| ØD | C | | F | G | H | K | L |
|------|-------|------------|----|----|----|----|----|
| 5/32 | 10-32 | 3698 04 20 | 10 | 10 | 28 | 11 | 18 |

= for food applications

3600 cartridge




| ØD | | G | H1 | H2 | N |
|----|----------------------------|------|------|------|---|
| 4 | 3600 04 00 | 10 | 9 | 8,5 | |
| 6 | 3600 06 00 | 12 | 11 | 8,5 | |
| 8 | 3600 08 00 | 15 | 12,5 | 8,5 | |
| 10 | 3600 10 00 | 17,5 | 14,5 | 10,5 | |
| 12 | 3600 12 00 | 19,5 | 15 | 10,5 | |
| 14 | 3600 14 00 | 21,5 | 16,5 | 12 | |



3618 single banjo, BSP parallel and metric




| ØD | C | | F1 | F2 | H | H1 | L1 | L2 |
|----|--------|----------------------------|----|----|------|-----|----|------|
| 4 | M5x0.8 | 3618 04 19 | 10 | 8 | 14,5 | 6,5 | 6 | 18,5 |
| 4 | G1/8 | 3618 04 10 | 17 | 14 | 23 | 9,5 | 10 | 20,5 |
| 6 | M5x0.8 | 3618 06 19 | 10 | 8 | 15 | 7 | 6 | 22,5 |
| 6 | G1/8 | 3618 06 10 | 17 | 14 | 23 | 9,5 | 10 | 23,5 |
| 6 | G1/4 | 3618 06 13 | 22 | 17 | 22 | 9 | 13 | 25,5 |
| 8 | G1/8 | 3618 08 10 | 17 | 14 | 23 | 9,5 | 10 | 26 |
| 8 | G1/4 | 3618 08 13 | 22 | 17 | 22 | 9 | 13 | 27,5 |
| 10 | G3/8 | 3618 10 17 | 22 | 22 | 33 | 14 | 13 | 32 |



3616 equal bulkhead connector



| ØD | | F1 | F2 | K | L1 | L2 | T |
|----|----------------------------|----|----|------|------|------|------|
| 4 | 3616 04 00 | 13 | 14 | 14 | 14 | 20 | 12,5 |
| 6 | 3616 06 00 | 16 | 17 | 17,5 | 17 | 22 | 15 |
| 8 | 3616 08 00 | 18 | 19 | 19,5 | 18,5 | 23,5 | 17 |
| 10 | 3616 10 00 | 22 | 27 | 24 | 21,5 | 26,5 | 21 |
| 12 | 3616 12 00 | 24 | 24 | 26 | 23 | 27 | 23 |
| 14 | 3616 14 00 | 27 | 27 | 29,5 | 25,5 | 29,5 | 25 |




| ØD | | F1 | F2 | K | L1 | L2 | T |
|-----|----------------------------|----|----|------|------|------|------|
| 1/4 | 3616 56 00 | 16 | 17 | 17,5 | 17 | 22,5 | 15 |
| 3/8 | 3616 60 00 | 22 | 24 | 24 | 22 | 28 | 21,5 |
| 1/2 | 3616 62 00 | 27 | 30 | 29,5 | 22,5 | 29 | 26,5 |

3606 equal tube to tube connector



| ØD | | G | L |
|----|----------------------------|------|------|
| 4 | 3606 04 00 | 10 | 30,5 |
| 6 | 3606 06 00 | 12 | 36,5 |
| 8 | 3606 08 00 | 15 | 37,5 |
| 10 | 3606 10 00 | 17,5 | 47,5 |
| 12 | 3606 12 00 | 19,5 | 50 |
| 14 | 3606 14 00 | 21,5 | 52,5 |




| ØD | | G | L |
|-----|----------------------------|------|------|
| 1/4 | 3606 56 00 | 12,5 | 36,5 |
| 3/8 | 3606 60 00 | 17 | 47,5 |
| 1/2 | 3606 62 00 | 20 | 48 |

3639 equal bulkhead elbow




| ØD | | F1 | F2 | H | K | L | T |
|----|----------------------------|----|----|------|------|------|------|
| 4 | 3639 04 00 | 13 | 14 | 35 | 14 | 18 | 12,5 |
| 6 | 3639 06 00 | 16 | 17 | 40,5 | 17,5 | 21,5 | 15 |
| 8 | 3639 08 00 | 18 | 19 | 44 | 19,5 | 23,5 | 17 |
| 10 | 3639 10 00 | 22 | 27 | 51 | 24 | 29 | 21 |
| 12 | 3639 12 00 | 24 | 24 | 55 | 26 | 31 | 23 |
| 14 | 3639 14 00 | 27 | 27 | 59 | 29,5 | 34 | 25 |



3602 equal elbow



| ØD | | G | L |
|----|----------------------------|------|------|
| 4 | 3602 04 00 | 10 | 23 |
| 6 | 3602 06 00 | 12 | 28 |
| 8 | 3602 08 00 | 15 | 31 |
| 10 | 3602 10 00 | 17,5 | 37,5 |
| 12 | 3602 12 00 | 19,5 | 40,5 |
| 14 | 3602 14 00 | 21,5 | 45 |




| ØD | | G | L |
|-----|----------------------------|------|------|
| 1/4 | 3602 56 00 | 12,5 | 28,5 |
| 3/8 | 3602 60 00 | 17 | 37,5 |
| 1/2 | 3602 62 00 | 20 | 41 |

3636 female bulkhead connector, BSP parallel




| ØD | C | | F1 | F2 | H | H1 | K | T |
|----|------|----------------------------|----|----|------|------|------|----|
| 4 | G1/8 | 3636 04 10 | 14 | 14 | 30,5 | 11 | 15 | 13 |
| 6 | G1/8 | 3636 06 10 | 17 | 17 | 33 | 11 | 18,5 | 15 |
| 6 | G1/4 | 3636 06 13 | 17 | 17 | 37 | 15 | 18,5 | 15 |
| 8 | G1/8 | 3636 08 10 | 19 | 19 | 34 | 10,5 | 21 | 17 |
| 8 | G1/4 | 3636 08 13 | 19 | 19 | 38 | 14,5 | 21 | 17 |
| 10 | G3/8 | 3636 10 17 | 22 | 27 | 42,5 | 16 | 24 | 21 |
| 12 | G3/8 | 3636 12 17 | 24 | 24 | 43 | 16 | 26 | 23 |
| 12 | G1/2 | 3636 12 21 | 27 | 24 | 48,5 | 21,5 | 29,5 | 23 |



3604 equal tee



| ØD | | G | H | L |
|----|----------------------------|------|------|------|
| 4 | 3604 04 00 | 10 | 23 | 18 |
| 6 | 3604 06 00 | 12 | 28 | 21,5 |
| 8 | 3604 08 00 | 15 | 31 | 23,5 |
| 10 | 3604 10 00 | 17,5 | 37,5 | 29 |
| 12 | 3604 12 00 | 19,5 | 40,5 | 31 |
| 14 | 3604 14 00 | 21,5 | 45 | 34 |




| ØD | | G | H | L |
|-----|----------------------------|------|------|----|
| 1/4 | 3604 56 00 | 12,5 | 28,5 | 22 |
| 3/8 | 3604 60 00 | 17 | 37,5 | 29 |
| 1/2 | 3604 62 00 | 20 | 41 | 31 |

3603 male stud run tee, BSP taper



| ØD | C | | F | G | H1 | H2 | K | L |
|----|------|------------|----|------|------|------|------|------|
| 4 | R1/8 | 3603 04 10 | 10 | 10 | 18 | 19,5 | 11 | 23 |
| 6 | R1/8 | 3603 06 10 | 13 | 12 | 21,5 | 23,5 | 14 | 28 |
| 6 | R1/4 | 3603 06 13 | 14 | 12 | 21,5 | 24,5 | 15 | 28 |
| 8 | R1/8 | 3603 08 10 | 14 | 15 | 23,5 | 25 | 15 | 31 |
| 8 | R1/4 | 3603 08 13 | 14 | 15 | 23,5 | 26,5 | 15 | 31 |
| 10 | R1/4 | 3603 10 13 | 18 | 17,5 | 29 | 30,5 | 19,5 | 37,5 |
| 12 | R3/8 | 3603 12 17 | 20 | 19,5 | 31 | 36,5 | 22 | 40,5 |
| 14 | R1/2 | 3603 14 21 | 22 | 21,5 | 34 | 40 | 24 | 45 |

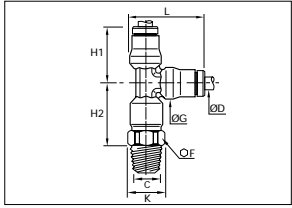


NPT

| ØD | C | | F | G | H1 | H2 | K | L |
|------|-----|------------|----|------|----|------|------|------|
| 5/32 | 1/8 | 3603 04 11 | 11 | 10 | 18 | 19,5 | 12 | 23 |
| 5/32 | 1/4 | 3603 04 14 | 14 | 10 | 18 | 21,5 | 15 | 23 |
| 1/4 | 1/8 | 3603 56 11 | 13 | 12,5 | 22 | 23,5 | 14 | 28,5 |
| 1/4 | 1/4 | 3603 56 14 | 14 | 12,5 | 22 | 24,5 | 15 | 28,5 |
| 1/4 | 3/8 | 3603 56 18 | 18 | 12,5 | 22 | 24,5 | 19,5 | 28,5 |
| 3/8 | 1/4 | 3603 60 14 | 18 | 17 | 29 | 30,5 | 19,5 | 37,5 |
| 3/8 | 3/8 | 3603 60 18 | 18 | 17 | 29 | 32,5 | 19,5 | 37,5 |
| 3/8 | 1/2 | 3603 60 22 | 22 | 17 | 29 | 32,5 | 24 | 37,5 |
| 1/2 | 3/8 | 3603 62 18 | 22 | 20 | 31 | 37 | 24 | 41 |
| 1/2 | 1/2 | 3603 62 22 | 22 | 20 | 31 | 38 | 24 | 41 |

3693 male stud run tee, BSP parallel and metric




| ØD | C | | F | G | H1 | H2 | K | L |
|----|--------|------------|----|------|------|------|------|------|
| 4 | M5x0.8 | 3693 04 19 | 10 | 10 | 18 | 22,5 | 11 | 23 |
| 4 | G1/8 | 3693 04 10 | 13 | 10 | 18 | 20,5 | 14 | 23 |
| 6 | G1/8 | 3693 06 10 | 13 | 12 | 21,5 | 25 | 14 | 28 |
| 6 | G1/4 | 3693 06 13 | 16 | 12 | 21,5 | 24,5 | 17,5 | 28 |
| 8 | G1/8 | 3693 08 10 | 14 | 15 | 23,5 | 26,5 | 15 | 31 |
| 8 | G1/4 | 3693 08 13 | 16 | 15 | 23,5 | 26,5 | 17,5 | 31 |
| 10 | G1/4 | 3693 10 13 | 18 | 17,5 | 29 | 33 | 19,5 | 37,5 |
| 12 | G3/8 | 3693 12 17 | 20 | 19,5 | 31 | 36,5 | 22 | 40,5 |
| 14 | G1/2 | 3693 14 21 | 24 | 21,5 | 34 | 38,5 | 26 | 45 |

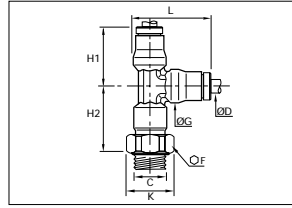

3666 plug-in reducer




| ØD1 | ØD2 | | G | L | L1 | L2 |
|-----|-----|------------|------|------|------|------|
| 4 | 6 | 3666 04 06 | 10 | 35 | 19,5 | 18 |
| 4 | 8 | 3666 04 08 | 10 | 35,5 | 20 | 18 |
| 6 | 8 | 3666 06 08 | 12 | 38 | 20 | 20,5 |
| 6 | 10 | 3666 06 10 | 12 | 43,5 | 25 | 21 |
| 8 | 10 | 3666 08 10 | 15 | 44 | 25 | 21,5 |
| 8 | 12 | 3666 08 12 | 15 | 44 | 26 | 20,5 |
| 10 | 12 | 3666 10 12 | 17,5 | 50 | 26 | 27 |
| 12 | 14 | 3666 12 14 | 19,5 | 53 | 28 | 28,5 |

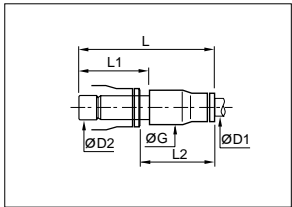

3620 double male stem connector




| ØD | | L | L1 |
|----|------------|------|------|
| 4 | 3620 04 00 | 31 | 14 |
| 6 | 3620 06 00 | 36,5 | 17 |
| 8 | 3620 08 00 | 37,5 | 17,5 |
| 10 | 3620 10 00 | 47,5 | 22,5 |
| 12 | 3620 12 00 | 49,5 | 23,5 |
| 14 | 3620 14 00 | 53 | 25 |

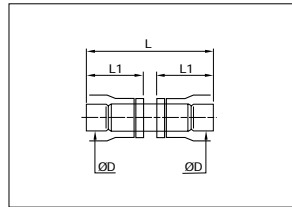

3668 plug-in increaser




| ØD1 | ØD2 | | G | L | L1 | L2 |
|-----|-----|------------|----|----|----|------|
| 6 | 4 | 3668 06 04 | 12 | 36 | 17 | 21,5 |



3622 plug-in barbed connector




| ØD1 | ØD2 | ØD3 | | L | L1 | L2 |
|-----|------|------|------------|------|------|------|
| 4 | 3,2 | 5 | 3622 04 53 | 40,5 | 27 | 22,5 |
| 4 | 5 | 7 | 3622 04 05 | 40,5 | 27 | 22,5 |
| 6 | 5 | 7 | 3622 06 05 | 43 | 27 | 22,5 |
| 8 | 6,3 | 8,3 | 3622 08 56 | 42 | 25 | 22,5 |
| 8 | 8 | 10 | 3622 08 08 | 44 | 27 | 22,5 |
| 10 | 6,3 | 10 | 3622 10 56 | 47,5 | 25 | 22,5 |
| 10 | 8 | 8,3 | 3622 10 08 | 47,5 | 25,5 | 22,5 |
| 12 | 8 | 10 | 3622 12 08 | 48,5 | 25,5 | 22,5 |
| 12 | 10 | 12 | 3622 12 10 | 48,5 | 25,5 | 22,5 |
| 12 | 12,5 | 14,5 | 3622 12 62 | 57 | 34 | 29,5 |
| 14 | 12,5 | 14,5 | 3622 14 62 | 57,5 | 33 | 29,5 |
| 14 | 14 | 16 | 3622 14 14 | 59,5 | 35 | 29,5 |



3667 plug-in metric/imperial adaptor




| ØD1 | ØD2 | | G | L | L1 | L2 |
|-----|------|------------|------|------|------|------|
| 4 | 3/16 | 3667 04 55 | | | | |
| 6 | 1/4 | 3667 06 56 | 12,5 | 38,5 | 19,5 | 21 |
| 10 | 3/8 | 3667 10 60 | 17 | 49,5 | 25 | 27 |
| 12 | 1/2 | 3667 12 62 | 20 | 51 | 26 | 27,5 |

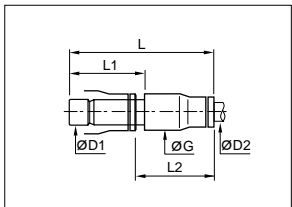


3626 blanking plug



| ØD1 | ØD2 | | L | L1 | L2 |
|-----|-----|------------|------|------|------|
| 4 | 6 | 3626 04 00 | 25,5 | 17 | 11,5 |
| 6 | 8 | 3626 06 00 | 30,5 | 19,5 | 13,5 |
| 8 | 10 | 3626 08 00 | 33 | 20 | 16 |
| 10 | 12 | 3626 10 00 | 40 | 25 | 18 |
| 12 | 14 | 3626 12 00 | 43 | 26 | 20 |
| 14 | 16 | 3626 14 00 | 47 | 28 | 22,5 |

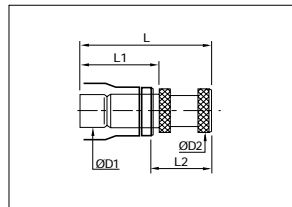



You will find the complete LF 3600 range
on our web-site
www.legris.com

