



aerospace
climate control
electromechanical
filtration
fluid & gas handling
hydraulics
pneumatics
process control
sealing & shielding



Quick Acting Couplers

in stainless steel AISI 316L



ENGINEERING YOUR SUCCESS.

A complete range for demanding applications

Legris remains responsive to specific market needs with an enhanced range of stainless quick acting couplers.

What is the purpose of a Quick Acting Coupler ?

Quick acting couplers enable frequent rapid connection and disconnection without the use of tools or specialist equipment. They enable easy **maintenance of a circuit or replacement of a component or tooling**, avoiding the shut-down of a machine or production process.

Legris couplers are available with single or double shut-off operation. The latter is designed to prevent leakage of dangerous or toxic fluids.

Constituent materials

Legris quick acting couplers are manufactured from **stainless steel AISI 316L**: body, ring, balls and probes. Springs are **stainless steel AISI 316 Ti**.

As standard, seals are **FKM**, providing high resistance to acids, hot water, oils and many aggressive fluids.



Food Industry



Chemicals



Medical



Pharmaceuticals



Industrial Equipment



Construction

Application fields

Stainless steel AISI 316L is compatible with many fluids, and thus numerous applications:






- food industry: e.g. supply of CO₂, water, gas or organic acids
- chemicals: e.g. supply of CO₂, water, gas or organic acids
- medical and pharmaceuticals: for filtration systems or analysis equipment
- industrial equipment: cooling circuits for injection moulds or presses
- construction: conveyance of compressed air, oils or water
- for general use where aggressive washdown chemicals are in regular use




Legris stainless steel couplers are available with **FDA approved FKM seals**, or with **EPDM seals**. **Suffix 21** should be added after the part number for a coupler with FDA approved FKM food quality seals or **suffix 30** for a coupler with EPDM seals.

The Legris range

Legris AISI 316L stainless steel couplers are suitable for aggressive environments and fluids. X20 and X21 are compact series. X25 and X27 series are perfectly suited for applications requiring higher flow due to their large diameter passage.

Profiles	Series	DN	Flow (single / double shut-off) NI/mi	Fluids	Maximum working pressure in bar*	Working temperature	Shut-off
	x20	2,7	165 / 130	Compressed air and all fluids compatible with constituent materials	35	From -15°C to +200°C	
	x21	5	560 / 310				
	x25	7,4	1800 / 710				
	x27	10	3500 / 900				

* Safety coefficient 4 : 1

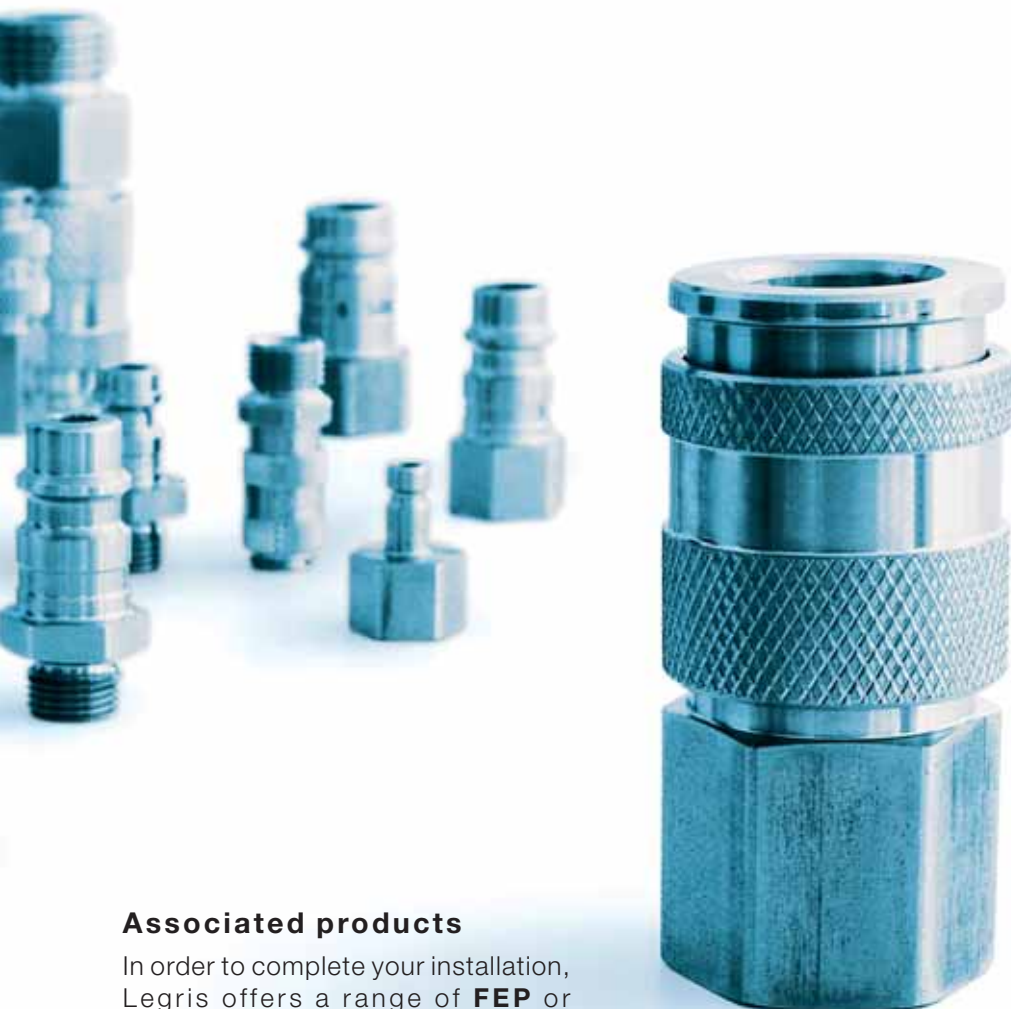

Associated products

In order to complete your installation, Legris offers a range of **FEP** or **polyethylene tubing** and **braided PVC hose**.

For standard applications, Legris provides polymer two stage release **safety** couplers and **nickel-plated brass** couplers.



Stainless steel is a steel and carbon alloy containing a minimum of 12% chromium. Its advantages are numerous:

- excellent resistance to corrosion
- large range of working temperatures
- compatibility with many fluids (e.g. air, water, nitric, acetic and organic acids)
- superior mechanical resistance
- long usage expectancy and value for money.

The choice of stainless steel grades may be based on corrosion resistance, manufacturing characteristics, availability, mechanical properties within specific temperature ranges etc. However, corrosion resistance and mechanical properties are usually the most important factors in selecting the grade for a given application. Within the many different grades of stainless steel, it is widely recognised that stainless steel AISI 316L is the best 'all round' grade for Q.A.C. use, particularly within the aggressive areas of chemical, pharmaceutical, industrial and marine environments.

Series X20

Ø internal passage:

2,7mm

Single shut-off flow:

165 NI/min (6 cfm)

Double shut-off flow:


130 NI/min (5 cfm)

Specifications:

- Bodies and probes: stainless steel AISI 316L
- FKM seals
- working pressure: 35 bar
- working temperature: -15°C to +200°C
- vacuum capability: 86% vacuum

Advantages:


- compact
- robust
- low pressure loss



Single shut-off
Double shut-off

9201


Male body BSP parallel and M5



C	With shut-off	E	F	G	L
M5	9201X20 19	5	9	10	26
G1/8	9201X20 10	7	11	10	28

9287-9087

Male thread BSP parallel and M5




C	With shut-off	E	F	L
M5	9287X20 19	5	9	28
G1/8	9287X20 10	7	11	30

C	Without shut-off	E	F	L
M5	9087X20 19	5	7	18
G1/8	9087X20 10	7	11	20

9214


Female body BSP parallel and M5



C	With shut-off	E	F	G	L
M5	9214X20 19	5	9	10	26
G1/8	9214X20 10	7	12	10	28

9286-9086

Female thread BSP parallel and M5




C	With shut-off	E	F	L
M5	9286X20 19	5	9	26
G1/8	9286X20 10	7	12	30


C	Without shut-off	E	F	L
M5	9086X20 19	5	7	17
G1/8	9086X20 10	7	12	19

Flow curves - Pressure loss

Air

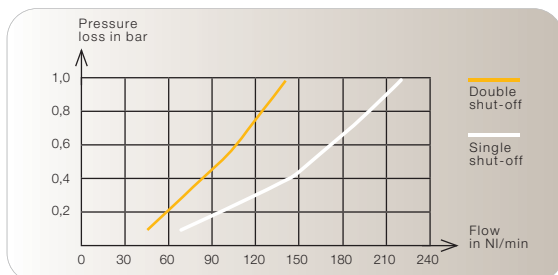

Water

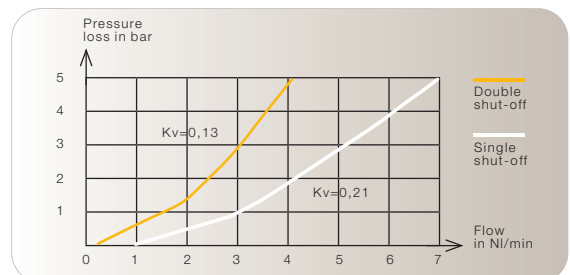

Series X21

Ø internal passage:

5 mm

Single shut-off flow:

560 NI/min (20 cfm)

Double shut-off flow:


310 NI/min (11 cfm)

Specifications:

- Bodies and probes: stainless steel AISI 316L
- FKM seals
- Working pressure: 35 bar
- Working temperature: -15°C to +200°C
- Vacuum capability: 86% vacuum

Advantages:

- light weight
- robust
- compact




Single shut-off

Double shut-off

9201


Male body BSP parallel



C	With shut-off	E	F	G	L
G1/8	9201X21 10	7	14	16	36
G1/4	9201X21 13	9	17	16	38

9287-9087

Male thread BSP parallel




C	With shut-off	E	F	L
G1/8	9287X21 10	7	14	40
G1/4	9287X21 13	9	17	42

C	Without shut-off	E	F	L
G1/8	9087X21 10	7	14	25
G1/4	9087X21 13	9	17	28

9214


Female body BSP parallel



C	With shut-off	E	F	G	L
G1/8	9214X21 10	9	14	16	36
G1/4	9214X21 13	9	17	16	38

9286-9086

Female thread BSP parallel




C	With shut-off	E	F	L
G1/8	9286X21 10	7	14	40
G1/4	9286X21 13	9	17	42


C	Without shut-off	E	F	L
G1/8	9086X21 10	8	14	25
G1/4	9086X21 13	9	17	25

Flow curves - Pressure loss

Air

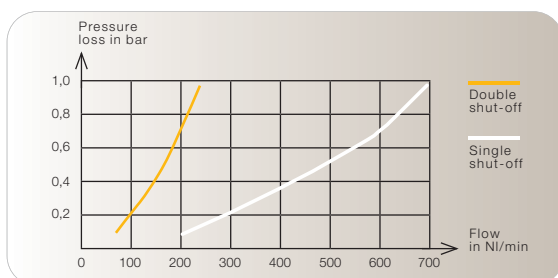

Water

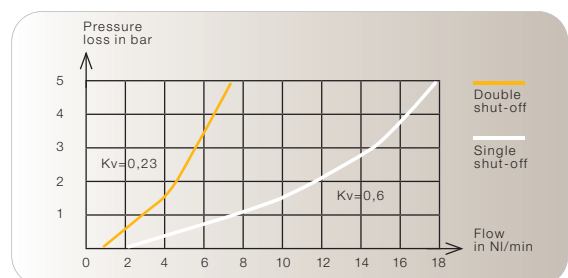

Series X25

Ø internal passage:

7,4 mm

Single shut-off flow:

1800 NI/min (64 cfm)

Double shut-off flow:



710 NI/min (25 cfm)

Specifications:

- bodies and probes: stainless steel AISI 316L
- FKM seals
- working pressure: 35 bar
- working temperature: -15°C to +200°C

Advantages:

- high flow
- robust




Single shut-off



Double shut-off

9201


Male body BSP parallel



C	With shut-off	E	F	G	L
G1/4	9201X25 13	10,5	19	23	59
G3/8	9201X25 17	9	19	23	57,5
G1/2	9201X25 21	12	24	23	60,5

9287-9087

Male thread BSP parallel




C	With shut-off	E	F	L
G1/4	9287X25 13	9	19	56
G3/8	9287X25 17	9	19	56
G1/2	9287X25 21	12	24	59

C	Without shut-off	E	F	L
G1/4	9087X25 13	9	17	33,5
G3/8	9087X25 17	9	19	33
G1/2	9087X25 21	12	24	38

9214


Female body BSP parallel



C	With shut-off	E	F	G	L
G1/4	9214X25 13	10	19	23	56
G3/8	9214X25 17	9	19	23	55
G1/2	9214X25 21	12	24	23	58

9286-9086

Female thread BSP parallel




C	With shut-off	E	F	L
G1/4	9286X25 13	10	19	54
G3/8	9286X25 17	9	19	54
G1/2	9286X25 21	12	24	56


C	Without shut-off	E	F	L
G1/4	9086X25 13	12	17	38,5
G3/8	9086X25 17	12	19	39,5
G1/2	9086X25 21	14	24	44

Flow curves - Pressure loss

Air

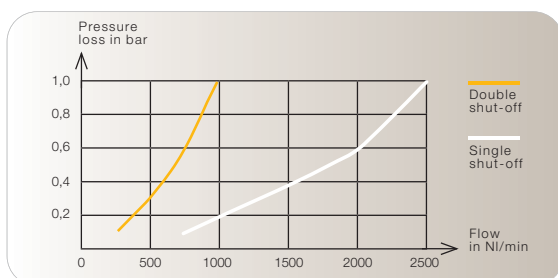

Water

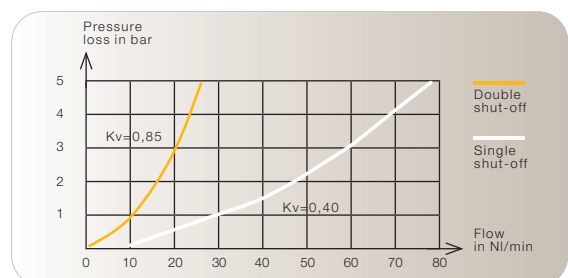

Series X27

Ø internal passage:

10 mm

Single shut-off flow:

3500 NI/min (124 cfm)

Double shut-off flow:


900 NI/min (32 cfm)

Specifications:

- bodies and probes: stainless steel AISI 316L
- FKM seals
- working pressure: 35 bar
- working temperature: -15°C to +200°C

Advantages:

- very high flow
- low pressure loss
- robust




Single shut-off



Double shut-off

9201


Male body BSP parallel



C	With shut-off	E	F	G	L
G3/8	9201X27 17	9	24	27	56,5
G1/2	9201X27 21	12	24	27	58,5
G3/4	9201X27 27	16	32	27	59,5

9287-9087

Male thread BSP parallel




C	With shut-off	E	F	L
G3/8	9287X27 17	9	24	55,5
G1/2	9287X27 21	12	24	57,5
G3/4	9287X27 27	16	32	58,5

C	Without shut-off	E	F	L
G3/8	9087X27 17	9	19	36,5
G1/2	9087X27 21	12	24	40
G3/4	9087X27 27	16	32	45

9214


Female body BSP parallel



C	With shut-off	E	F	G	L
G3/8	9214X27 17	11	24	27	56
G1/2	9214X27 21	12	24	27	56
G3/4	9214X27 27	16	32	27	60

9286-9086

Female thread BSP parallel




C	With shut-off	E	F	L
G3/8	9286X27 17	9	24	54,5
G1/2	9286X27 21	12	24	54,5
G3/4	9286X27 27	16	24	58,5


C	Without shut-off	E	F	L
G3/8	9086X27 17	9	19	33
G1/2	9086X27 21	12	24	37
G3/4	9086X27 27	16	32	42

Flow curves - Pressure loss

Air

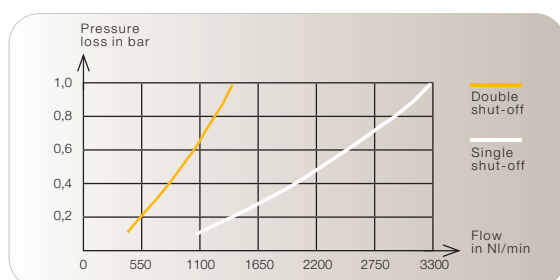

Water

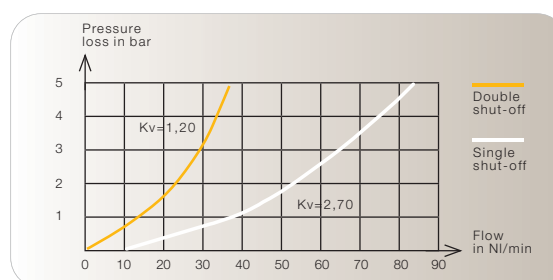

Parker Worldwide

Europe, Middle East, Africa

AE – United Arab Emirates,
Dubai
Tel: +971 4 8127100
parker.me@parker.com

AT – Austria, Wiener Neustadt
Tel: +43 (0)2622 23501-0
parker.austria@parker.com

AT – Eastern Europe, Wiener
Neustadt
Tel: +43 (0)2622 23501 900
parker.easteurope@parker.com

AZ – Azerbaijan, Baku
Tel: +994 50 2233 458
parker.azerbaijan@parker.com

BE/LU – Belgium, Nivelles
Tel: +32 (0)67 280 900
parker.belgium@parker.com

BY – Belarus, Minsk
Tel: +375 17 209 9399
parker.belarus@parker.com

CH – Switzerland, Etoy
Tel: +41 (0)21 821 87 00
parker.switzerland@parker.com

CZ – Czech Republic, Klecany
Tel: +420 284 083 111
parker.czechrepublic@parker.com

DE – Germany, Kaarst
Tel: +49 (0)2131 4016 0
parker.germany@parker.com

DK – Denmark, Ballerup
Tel: +45 43 56 04 00
parker.denmark@parker.com

ES – Spain, Madrid
Tel: +34 902 330 001
parker.spain@parker.com

FI – Finland, Vantaa
Tel: +358 (0)20 753 2500
parker.finland@parker.com

FR – France, Contamine s/Arve
Tel: +33 (0)4 50 25 80 25
parker.france@parker.com

GR – Greece, Athens
Tel: +30 210 933 6450
parker.greece@parker.com

HU – Hungary, Budapest
Tel: +36 1 220 4155
parker.hungary@parker.com

IE – Ireland, Dublin
Tel: +353 (0)1 466 6370
parker.ireland@parker.com

IT – Italy, Corsico (MI)
Tel: +39 02 45 19 21
parker.italy@parker.com

KZ – Kazakhstan, Almaty
Tel: +7 7272 505 800
parker.easteurope@parker.com

NL – The Netherlands, Oldenzaal
Tel: +31 (0)541 585 000
parker.nl@parker.com

NO – Norway, Asker
Tel: +47 66 75 34 00
parker.norway@parker.com

PL – Poland, Warsaw
Tel: +48 (0)22 573 24 00
parker.poland@parker.com

PT – Portugal, Leca da Palmeira
Tel: +351 22 999 7360
parker.portugal@parker.com

RO – Romania, Bucharest
Tel: +40 21 252 1382
parker.romania@parker.com

RU – Russia, Moscow
Tel: +7 495 645-2156
parker.russia@parker.com

SE – Sweden, Spånga
Tel: +46 (0)8 59 79 50 00
parker.sweden@parker.com

SK – Slovakia, Banská Bystrica
Tel: +421 484 162 252
parker.slovakia@parker.com

SL – Slovenia, Novo Mesto
Tel: +386 7 337 6650
parker.slovenia@parker.com

TR – Turkey, Istanbul
Tel: +90 216 4997081
parker.turkey@parker.com

UA – Ukraine, Kiev
Tel: +380 44 494 2731
parker.ukraine@parker.com

UK – United Kingdom, Warwick
Tel: +44 (0)1926 317 878
parker.uk@parker.com

ZA – South Africa, Kempton Park
Tel: +27 (0)11 961 0700
parker.southafrica@parker.com

North America

CA – Canada, Milton, Ontario
Tel: +1 905 693 3000

US – USA, Cleveland
Tel: +1 216 896 3000

Asia Pacific

AU – Australia, Castle Hill
Tel: +61 (0)2-9634 7777

CN – China, Shanghai
Tel: +86 21 2899 5000

HK – Hong Kong
Tel: +852 2428 8008

IN – India, Mumbai
Tel: +91 22 6513 7081-85

JP – Japan, Tokyo
Tel: +81 (0)3 6408 3901

KR – South Korea, Seoul
Tel: +82 2 559 0400

MY – Malaysia, Shah Alam
Tel: +60 3 7849 0800

NZ – New Zealand, Mt Wellington
Tel: +64 9 574 1744

SG – Singapore
Tel: +65 6887 6300

TH – Thailand, Bangkok
Tel: +662 717 8140

TW – Taiwan, Taipei
Tel: +886 2 2298 8987

South America

AR – Argentina, Buenos Aires
Tel: +54 3327 44 4129

BR – Brazil, Sao Jose dos Campos
Tel: +55 12 4009 3500

CL – Chile, Santiago
Tel: +56 2 623 1216

MX – Mexico, Apodaca
Tel: +52 81 8156 6000

VE – Venezuela, Caracas
Tel: +58 212 238 5422

European Product Information Centre

Free phone: 00 800 27 27 5374

(from AT, BE, CH, CZ, DE, DK, EE, ES, FI,
FR, IE, IL, IS, IT, LU, MT, NL, NO, PL, PT, RU,
SE, SK, UK, ZA)



Fluid System Connectors Europe
Legris SAS

Parker Hannifin Corporation

CS 46911 - 74 rue de Paris

35069 Rennes

Phone : +33 (2) 99 25 55 00

Fax : +33 (2) 99 25 55 99

www.parkerconnectic.com